




Powered by:

 **Perkins®****STAMFORD**

GENERATING SET PERFORMANCE	50Hz	60Hz
VOLTAGE	V400	
PHASES	Three	
PRIME RATED POWER	135.0kVA	
STANDBY RATED POWER	150.0kVA	
POWER FACTOR	0.80 PF	
FUEL USAGE @ 75%	24.1 L/hr	

The POWERGen Group Ltd:

**POWER**Gen**POWER**Serv**POWER**Pump**POWER**GenHire**POWER**Gen Group Ltd**CONTACT**

Tel: + 64 7 543 1336

Fax: + 64 7 543 1346

Toll Free: **0800 679 800****STREET ADDRESS**

49 Whiore Avenue

Tauriko

Tauranga

POSTAL ADDRESS

PO Box 14254

Tauranga Mail Centre

3143 New Zealand

ENGINE	PERKINS	1006TAG
PERFORMANCE	50Hz	60Hz
BASELOAD RATED POWER	TBA	
PRIME RATED POWER	121.0KWm	
STANDBY RATED POWER	133.5KWm	
FUEL CONSUMPTION	212g/KWh @ 100% 214g/KWh @ 75% 212g/KWh @ 50%	
TYPE	Diesel 4 stroke	
ASPIRATION	Turbocharged air to air aftercooled	
INJECTION TYPE	Direct injection	
ENGINE GOVERNOR	Electronic governor	
CYLINDERS AND ARRANGEMENT	Six in line	
BORE AND STROKE	100mm x 127mm	
COMPRESSION RATIO	17.0 : 1	
ELECTRICAL SYSTEM VOLTAGE	12 volt	
BATTERY TYPE	Lead acid, 12V	
DERATING FOR TEMPERATURE	40deg C	
DERATING FOR ALTITUDE	1000m	
DERATING FOR HUMIDITY	90%	

The POWERGen Group Ltd:

**POWER**Gen**POWER**Serv**POWER**Pump**POWER**GenHire**POWER**Gen Group Ltd**CONTACT**Tel: + 64 7 543 1336
Fax: + 64 7 543 1346
Toll Free: **0800 679 800****STREET ADDRESS**49 Whiore Avenue
Tauriko
Tauranga**POSTAL ADDRESS**PO Box 14254
Tauranga Mail Centre
3143 New Zealand

ALTERNATOR**STAMFORD**

PERFORMANCE	50Hz	60Hz
MODEL	UCI274E	
BASELOAD RATED POWER 40 deg C	125kVA	
PRIME RATED POWER 40 deg C	140kVA	
STANDBY RATED POWER 40 deg C	145kVA	
STANDBY RATED POWER 27 deg C	150kVA	
EFFICIENCY	91%	
STANDARD WING CONNECTIONS	Star Delta	
EXCITER	Self excited	
POLES	4 poles	
PHASES	Three phases	
WIRES	12 leads	
VOLTAGE REGULATION	+/- 1.5%	
INSULATION CLASS	Class H	
ENCLOSURE	IP23	
MAXIMUM OVERSPEED	150%	
STANDARD AVR MODEL	SX460	
OPTIONAL AVR MODEL	MX341 with P.M.G	
DERATING FOR TEMPERATURE	40 deg C	
DERATING FOR ALTITUDE	1000mm	

The POWERGen Group Ltd:

**POWER**Gen**POWERServ****POWERPump****POWERGenHire****POWERGen Group Ltd****CONTACT**

Tel: + 64 7 543 1336

Fax: + 64 7 543 1346

Toll Free: **0800 679 800****STREET ADDRESS**

49 Whiore Avenue

Tauriko

Tauranga

POSTAL ADDRESS

PO Box 14254

Tauranga Mail Centre

3143 New Zealand

DIMENSIONS AND CAPACITY


STANDARD MODELS

	INTEGRATED FUEL TANK CAPACITY		WEIGHT	DIMENSIONS		
	STANDARD	OPTIONAL	KG	LENGTH	WIDTH	HEIGHT
OPEN SKID TYPE	140	TBA	1376kg	2565mm	730mm	1575mm

GENERATOR SET EQUIPMENT

STANDARD MODELS

- Heavy duty steel base frame
- Pad type anti- vibration dampers
- Integrated fuel tank, base mounted
- 12V battery
- Key start switch
- Emergency stop button
- Silencer industrial type (open skid type)

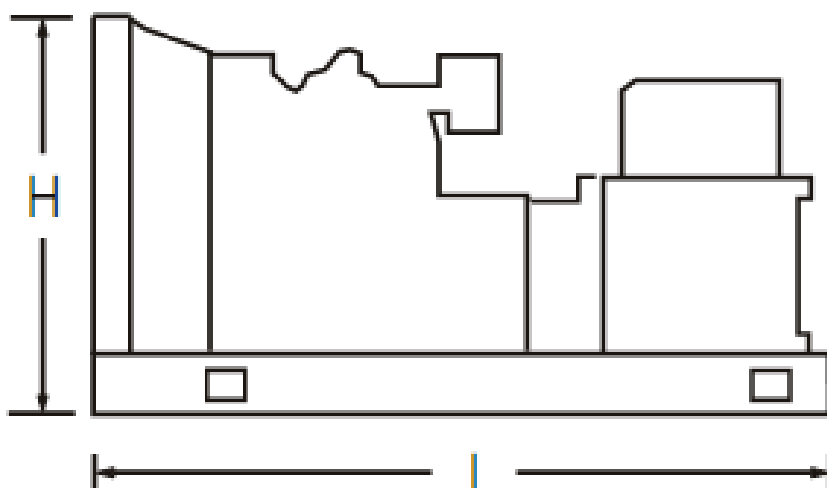

The POWERGen Group Ltd:



CONTACT
Tel: + 64 7 543 1336
Fax: + 64 7 543 1346
Toll Free: **0800 679 800**

STREET ADDRESS
49 Whiore Avenue
Tauriko
Tauranga

POSTAL ADDRESS
PO Box 14254
Tauranga Mail Centre
3143 New Zealand



InteliLite® AMF 20/AMF 25 Automatic Mains Failure Controller



AUTOMATIC MODELS- EQUIPMENT

4 poles ABB circuit breaker, electronic control unit ComAp AMF25, control panel box key, emergency stop button, water jacket heater,

AUTOMATIC MODELS- PROTECTORS

Low oil pressure, low fuel level, overload, over/ under frequency, low voltage, over/ under battery voltage belt breakage

AUTOMATIC MODELS- INSTRUMENTATION

Voltmeter, ammeter (3 phases), frequency meter, hour meter, battery voltage meter, fuel level

The POWERGen Group Ltd:

**POWERGen****POWERServ****POWERPump****POWERGenHire****POWERGen Group Ltd****CONTACT**

Tel: + 64 7 543 1336

Fax: + 64 7 543 1346

Toll Free: **0800 679 800****STREET ADDRESS**

49 Whiore Avenue

Tauriko


Tauranga

POSTAL ADDRESS

PO Box 14254

Tauranga Mail Centre

3143 New Zealand

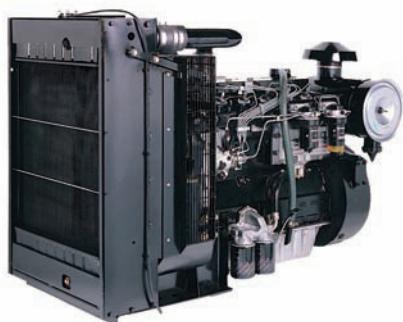


1000 Series

1006TAG

Diesel Engine – ElectropaK

133.5 kWm 1500 rev/min

147.0 kWm 1800 rev/min

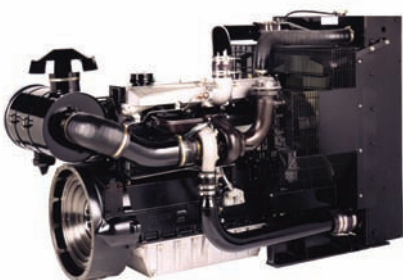

Economic power

- Single side servicing for reduced service time and cost.
- Unique Fastram combustion system enables high power output plus low fuel consumption.
- Electronic governor gives close control and means that the rated speed can be set at site to either 1500 rpm or 1800 rpm allowing standard builds to operate at either 50 Hz or 60 Hz.

Clean, efficient power

- Operator and environmentally friendly with low noise, rapid startability and low emissions that satisfy TA Luft requirements.

Durable power

- Maximum cooling efficiency is provided by a gear driven water pump and independent fan drive.
- Leak free operation is ensured by Viton crankshaft seals and sophisticated controlled swell joints, giving protection in the toughest conditions.
- Inserted valve seats, oil spray cooled pistons and compact plate cooler give enhanced engine life.

Reliable power

- Suitable for operation in ambient temperatures up to 52°C (46°C if a canopy is fitted).
- Fuelled starting aid for temperatures down to -20°C.

Product Support

- Perkins actively pursues product support excellence by ensuring our distribution network invest in their territory - strengthening relationships and providing more value to you, our customer.
- Through an experienced global network of distributors and dealers, fully trained engine experts deliver total service support around the clock, 365 days a year. They have a comprehensive suite of web based tools at their fingertips covering technical information, parts identification and ordering systems, all dedicated to maximising the productivity of your engine.
- Throughout the entire life of a Perkins engine, we provide access to genuine OE specification parts and service. We give 100% reassurance that you receive the very best in terms of quality for lowest possible cost .. wherever your Perkins powered machine is operating in the world.

The Perkins 1000 Series family of ElectropaK engines are renowned throughout the power generation industry for their superior performance and reliability.

The 1006TAG is a turbocharged, 6 cylinder, 6 litre engine. Its premium design features provide economic and durable operation offering the ideal characteristics for electrical power generation.

Engine Speed (rev/min)	Type of Operation	Typical Generator Output (Net)		Engine Power			
				Gross		Net	
		kVA	kWe	kWm	bhp	kWm	bhp
1500	Prime Power	136.0	109.0	128.4	171.4	121.0	162.3
	Standby Power	150.0	120.0	141.0	187.7	133.5	179.0
1800	Prime Power	151.0	120.5	144.2	193.8	134.0	179.7
	Standby Power	165.5	132.5	158.5	212.1	147.0	197.1

All ratings data based on operating under ISO/TR 14396/ISO 8528 conditions using typical fan sizes and drive ratios. For operation outside of these conditions please consult your Perkins contact. Performance tolerance quoted by Perkins is +5%. Electrical ratings assume a power factor of 0.8 and a generator efficiency of 90%. Fuel specification: BS 2869 Part 2 1998 Class A2 or ASTM D975 D2 Lubrication oil: A single or multigrade oil to ACEA/E1 E2 or API CD/SD

Rating Definitions Prime Power: Power available at variable load in lieu of main power network. An overload of 10% is permitted for 1 hour in every 12 hours of operation. Standby Power: Power available at variable load in the event of a main power network failure. No overload is permitted.

1000 Series

1006TAG

Standard ElectropaK Specification

Air inlet

- Mounted air filter and turbocharger

Fuel system

- Rotary fuel injection pump
- Mechanical governing conforms to ISO 8528-5 1993(E) Class G2, ISO 3046-4M3
- Spin-on full flow fuel oil filters and pre-filter

Lubrication system

- Flat bottomed aluminium sump
- Spin-on full flow oil filters
- Oil cooler

Cooling system

- Thermostat controlled cooling system with gear driven water pump
- 25" belt-driven pusher fan and guards
- Radiator incorporating air-to-air charge cooler and piping

Electrical system

- 12 volt starter motor and 55 amp alternator with DC output
- 12 volt oil Pressure and coolant temperature switches
- 12 volt shut down solenoid – energised to run cold start aid

Flywheel and housing


- High inertia flywheel to SAE J620 size 10/11½

Mountings

- Front engine mounting bracket

Optional Equipment

- 24 volt alternator
- 24 volt starter motor
- Water temperature gauge and sender
- Heater/Starter switch
- Rear engine mountings
- Workshop manual
- Parts book
- User handbook
- Electronic governor (12 volt only)

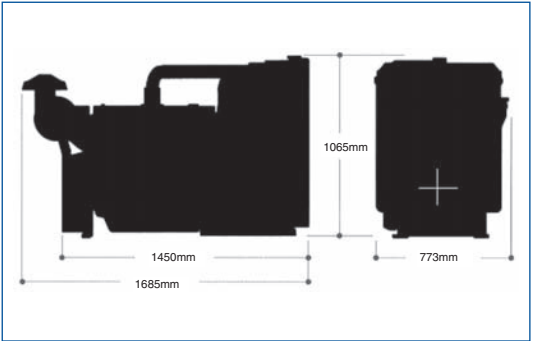

Fuel Consumption				
Engine Speed	1500 rev/min		1800 rev/min	
	g/kWh	l/hr	g/kWh	l/hr
Standby	7.6	34.6	9.1	41.3
Prime power	6.9	31.5	8.3	37.6
75% of prime power	5.3	24.1	6.4	28.9
50% of prime power	3.5	16.5	4.3	19.4

General Data

Number of cylinders	6
Cylinder arrangement	Vertical in-line
Cycle	4 stroke
Induction system	Turbocharged, air-to-air aftercooled
Combustion system	Direct injection
Cooling system	Water-cooled
Bore and stroke	100 x 127 mm
Displacement	5.99 litres
Compression ratio	17.0:1
Direction of rotation	Anti-Clockwise, viewed on the flywheel
Total lubrication system capacity	19.0 litres
Coolant capacity (inc. radiator)	37.22 litres
Length	1685 mm
Width	773 mm
Height	1065 mm
Total weight (dry)	690 kg

Overall dimensions and weight will depend on final specification.




Perkins Engines Company Limited

Peterborough PE1 5NA
United Kingdom
Telephone +44 (0)1733 583000
Fax +44 (0)1733 582240
www.perkins.com

All information in this document is substantially correct at time of printing and may be altered subsequently
Publication No. 1578/11/08 Produced in England ©2005 Perkins Engines Company Limited

Distributed by

UCI274E - Technical Data Sheet

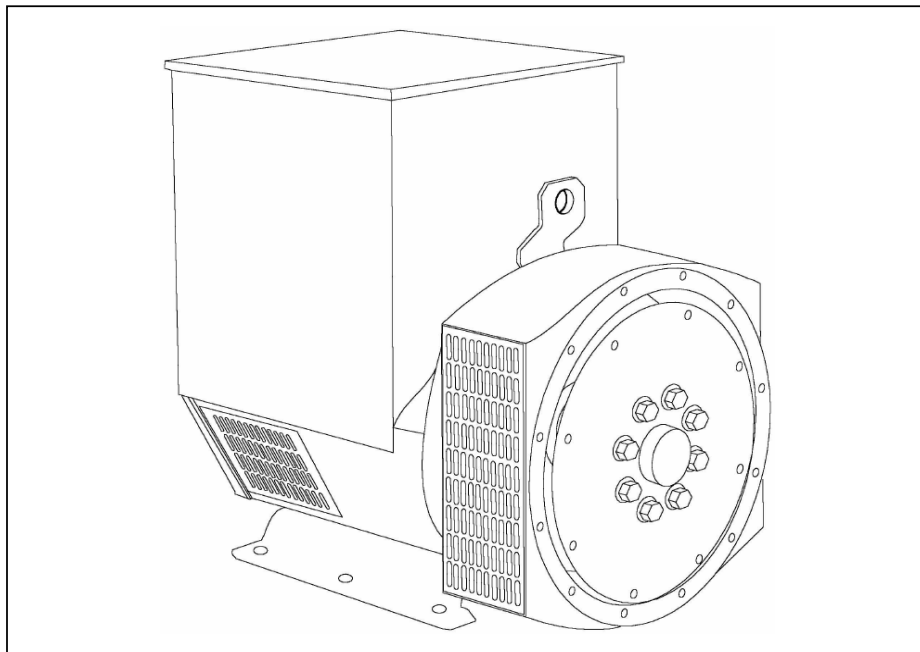

UCI274E

SPECIFICATIONS & OPTIONS



STANDARDS

Newage Stamford industrial generators meet the requirements of BS EN 60034 and the relevant section of other international standards such as BS5000, VDE 0530, NEMA MG1-32, IEC34, CSA C22.2-100, AS1359. Other standards and certifications can be considered on request.

VOLTAGE REGULATORS

SX460 AVR - STANDARD

With this self excited control system the main stator supplies power via the Automatic Voltage Regulator (AVR) to the exciter stator. The high efficiency semiconductors of the AVR ensure positive build-up from initial low levels of residual voltage.

The exciter rotor output is fed to the main rotor through a three phase full wave bridge rectifier. This rectifier is protected by a surge suppressor against surges caused, for example, by short circuit.

SX440 AVR

With this self-excited system the main stator provides power via the AVR to the exciter stator. The high efficiency semi-conductors of the AVR ensure positive build-up from initial low levels of residual voltage.

The exciter rotor output is fed to the main rotor through a three-phase full-wave bridge rectifier. The rectifier is protected by a surge suppressor against surges caused, for example, by short circuit or out-of-phase paralleling.

The SX440 will support a range of electronic accessories, including a 'droop' Current Transformer (CT) to permit parallel operation with other ac generators.

If 3-phase sensing is required with the self-excited system, the SX421 AVR must be used.

SX421AVR

This AVR also operates in a self-excited system. It combines all the features of the SX440 with, additionally, three-phase rms sensing for improved regulation and performance. Over voltage protection is provided via a separate circuit breaker. An engine relief load acceptance feature is built in as standard.

MX341 AVR

This sophisticated AVR is incorporated into the Stamford Permanent Magnet Generator (PMG) control system.

The PMG provides power via the AVR to the main exciter, giving a source of constant excitation power independent of generator output. The main exciter output is then fed to the main rotor, through a full wave bridge, protected by a surge suppressor. The AVR has in-built protection against sustained over-excitation, caused by internal or external faults. This de-excites the machine after a minimum of 5 seconds.

An engine relief load acceptance feature can enable full load to be applied to the generator in a single step.

If three-phase sensing is required with the PMG system the MX321 AVR must be used.

We recommend three-phase sensing for applications with greatly unbalanced or highly non-linear loads.

MX321 AVR

The most sophisticated of all our AVRs combines all the features of the MX341 with, additionally, three-phase rms sensing, for improved regulation and performance.

Over voltage protection is built-in and short circuit current level adjustments is an optional facility.

WINDINGS & ELECTRICAL PERFORMANCE

All generator stators are wound to 2/3 pitch. This eliminates triplen (3rd, 9th, 15th ...) harmonics on the voltage waveform and is found to be the optimum design for trouble-free supply of non-linear loads. The 2/3 pitch design avoids excessive neutral currents sometimes seen with higher winding pitches, when in parallel with the mains. A fully connected damper winding reduces oscillations during paralleling. This winding, with the 2/3 pitch and carefully selected pole and tooth designs, ensures very low waveform distortion.

TERMINALS & TERMINAL BOX

Standard generators are 3-phase reconnectable with 12 ends brought out to the terminals, which are mounted on a cover at the non-drive end of the generator. A sheet steel terminal box contains the AVR and provides ample space for the customers' wiring and gland arrangements. It has removable panels for easy access.

SHAFT & KEYS

All generator rotors are dynamically balanced to better than BS6861:Part 1 Grade 2.5 for minimum vibration in operation. Two bearing generators are balanced with a half key.

INSULATION/IMPREGNATION

The insulation system is class 'H'.

All wound components are impregnated with materials and processes designed specifically to provide the high build required for static windings and the high mechanical strength required for rotating components.

QUALITY ASSURANCE

Generators are manufactured using production procedures having a quality assurance level to BS EN ISO 9001.

The stated voltage regulation may not be maintained in the presence of certain radio transmitted signals. Any change in performance will fall within the limits of Criteria 'B' of EN 61000-6-2:2001. At no time will the steady-state voltage regulation exceed 2%.

NB Continuous development of our products entitles us to change specification details without notice, therefore they must not be regarded as binding.

Front cover drawing typical of product range.

UCI274E

WINDING 311

CONTROL SYSTEM	SEPARATELY EXCITED BY P.M.G.							
A.V.R.	MX321	MX341						
VOLTAGE REGULATION	± 0.5 %	± 1.0 %	With 4% ENGINE GOVERNING					
SUSTAINED SHORT CIRCUIT	REFER TO SHORT CIRCUIT DECREMENT CURVES (page 7)							

CONTROL SYSTEM	SELF EXCITED							
A.V.R.	SX460	SX440	SX421					
VOLTAGE REGULATION	± 1.5 %	± 1.0 %	± 0.5 %	With 4% ENGINE GOVERNING				
SUSTAINED SHORT CIRCUIT	SERIES 4 CONTROL DOES NOT SUSTAIN A SHORT CIRCUIT CURRENT							

INSULATION SYSTEM	CLASS H							
PROTECTION	IP23							
RATED POWER FACTOR	0.8							
STATOR WINDING	DOUBLE LAYER CONCENTRIC							
WINDING PITCH	TWO THIRDS							
WINDING LEADS	12							
STATOR WDG. RESISTANCE	0.0317 Ohms PER PHASE AT 22°C SERIES STAR CONNECTED							
ROTOR WDG. RESISTANCE	1.34 Ohms at 22°C							
R.F.I. SUPPRESSION	BS EN 61000-6-2 & BS EN 61000-6-4,VDE 0875G, VDE 0875N. refer to factory for others							
WAVEFORM DISTORTION	NO LOAD < 1.5% NON-DISTORTING BALANCED LINEAR LOAD < 5.0%							
MAXIMUM OVERSPEED	2250 Rev/Min							
BEARING DRIVE END	BALL. 6315-2RS (ISO)							
BEARING NON-DRIVE END	BALL. 6310-2RS (ISO)							
	1 BEARING				2 BEARING			
WEIGHT COMP. GENERATOR	492 kg				511 kg			
WEIGHT WOUND STATOR	180 kg				180 kg			
WEIGHT WOUND ROTOR	167.51 kg				156.55 kg			
WR² INERTIA	1.3271 kgm²				1.2765 kgm²			
SHIPPING WEIGHTS in a crate	525 kg				539 kg			
PACKING CRATE SIZE	105 x 67 x 103(cm)				123 x 67 x 103(cm)			
	50 Hz				60 Hz			
TELEPHONE INTERFERENCE	THF<2%				TIF<50			
COOLING AIR	0.514 m³/sec 1090 cfm				0.617 m³/sec 1308 cfm			
VOLTAGE SERIES STAR	380/220	400/231	415/240	440/254	416/240	440/254	460/266	480/277
VOLTAGE PARALLEL STAR	190/110	200/115	208/120	220/127	208/120	220/127	230/133	240/138
VOLTAGE SERIES DELTA	220/110	230/115	240/120	254/127	240/120	254/127	266/133	277/138
kVA BASE RATING FOR REACTANCE VALUES	140	140	140	n/a	160	167.5	167.5	178.8
Xd DIR. AXIS SYNCHRONOUS	2.34	2.11	1.96	-	2.68	2.51	2.29	2.25
X'd DIR. AXIS TRANSIENT	0.21	0.19	0.18	-	0.25	0.23	0.21	0.21
X''d DIR. AXIS SUBTRANSIENT	0.14	0.13	0.12	-	0.17	0.16	0.15	0.14
Xq QUAD. AXIS REACTANCE	1.53	1.38	1.28	-	1.74	1.63	1.49	1.46
X''q QUAD. AXIS SUBTRANSIENT	0.18	0.16	0.15	-	0.22	0.21	0.19	0.18
Xl LEAKAGE REACTANCE	0.08	0.08	0.07	-	0.09	0.08	0.08	0.08
X2 NEGATIVE SEQUENCE	0.16	0.14	0.13	-	0.19	0.18	0.16	0.16
X0 ZERO SEQUENCE	0.10	0.09	0.08	-	0.11	0.10	0.09	0.09

REACTANCES ARE SATURATED		VALUES ARE PER UNIT AT RATING AND VOLTAGE INDICATED						
T'd TRANSIENT TIME CONST.	0.032 s							
T''d SUB-TRANSTIME CONST.	0.01 s							
T'do O.C. FIELD TIME CONST.	0.85 s							
Ta ARMATURE TIME CONST.	0.007 s							
SHORT CIRCUIT RATIO	1/Xd							





**50
Hz**

UCI274E

Winding 311

STAMFORD
power generation

THREE PHASE EFFICIENCY CURVES

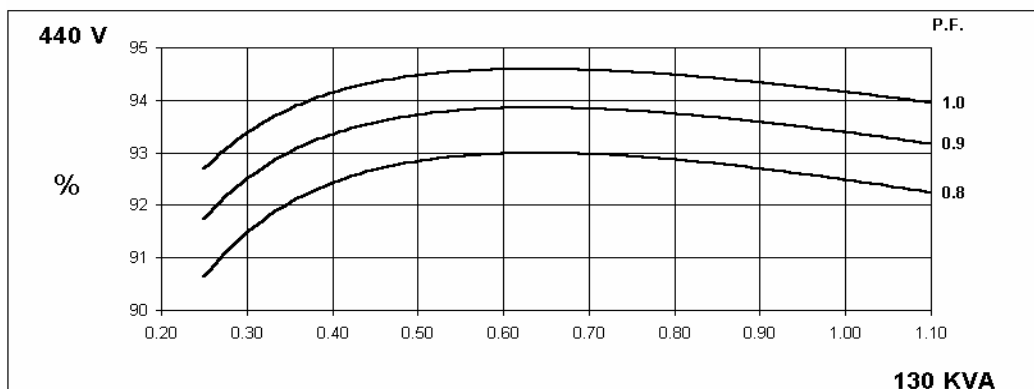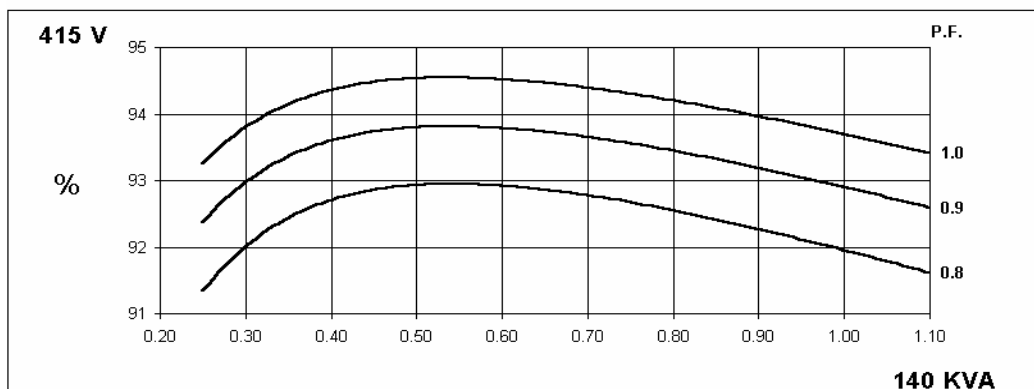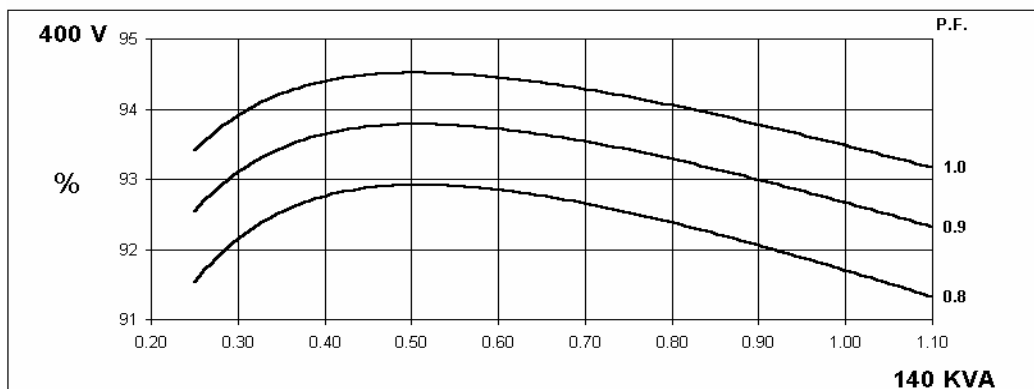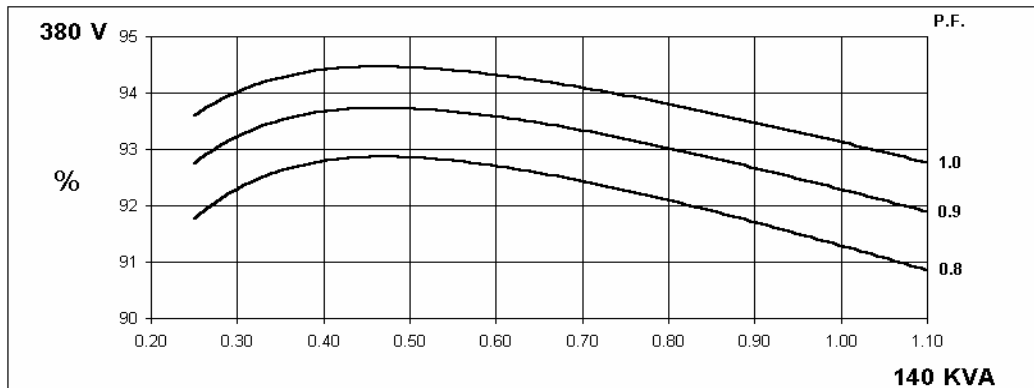

UCI274E


Winding 311




Locked Rotor Motor Starting Curve

50
Hz

MX

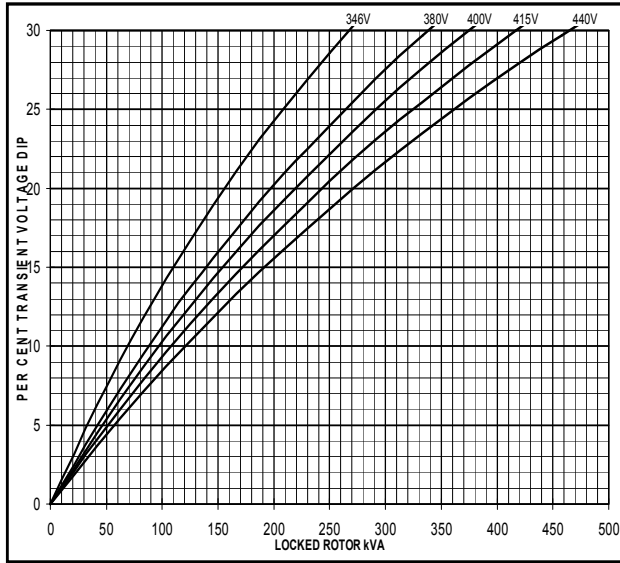


SX

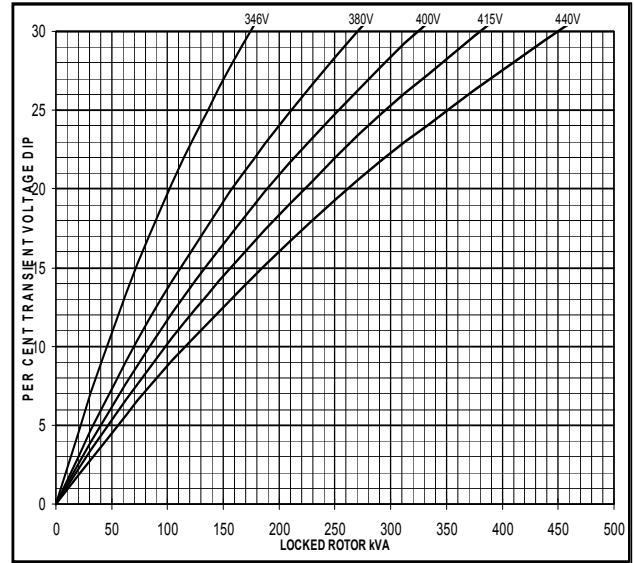


60
Hz

MX

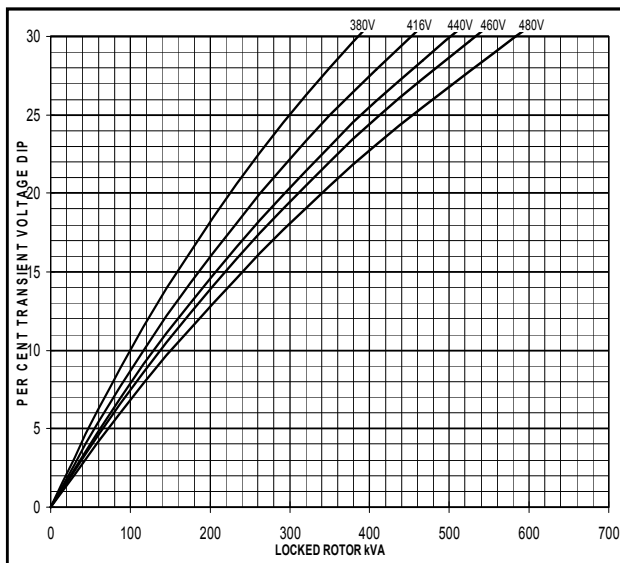


SX

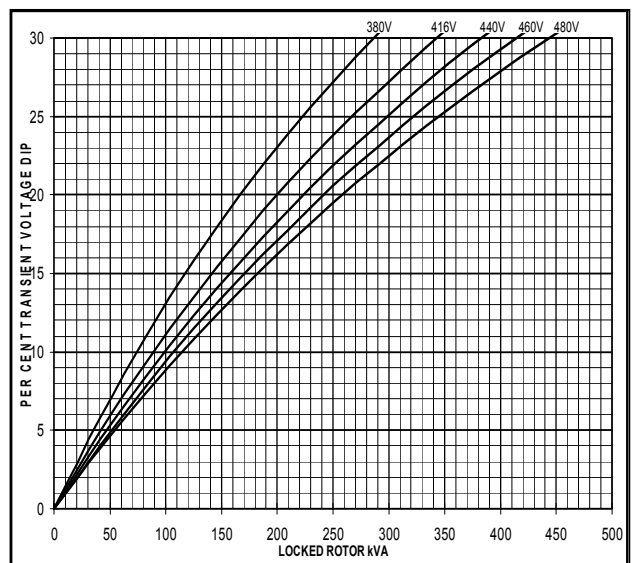


**Three-phase Short Circuit Decrement Curve. No-load Excitation at Rated Speed
Based on star (wye) connection.**

**50
Hz**

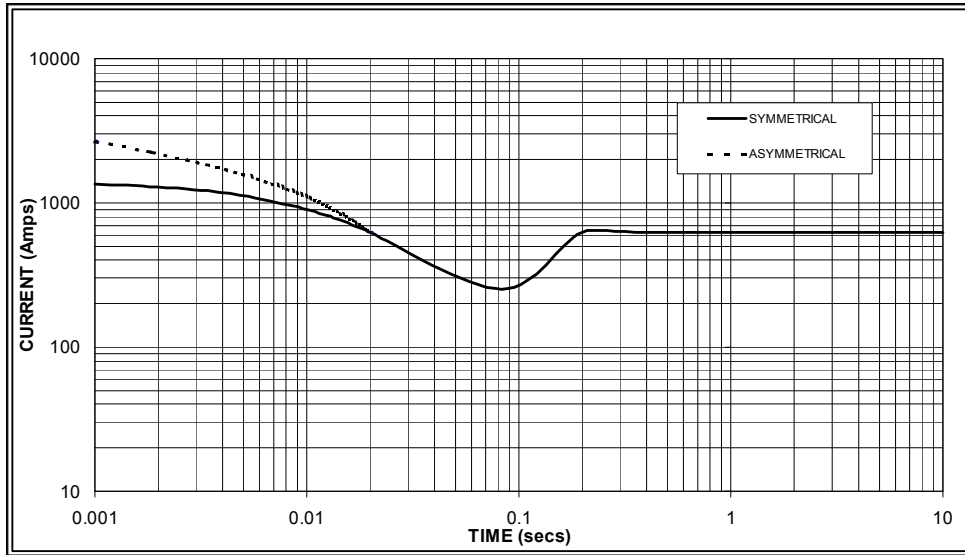

Sustained Short Circuit = 630 Amps

**60
Hz**

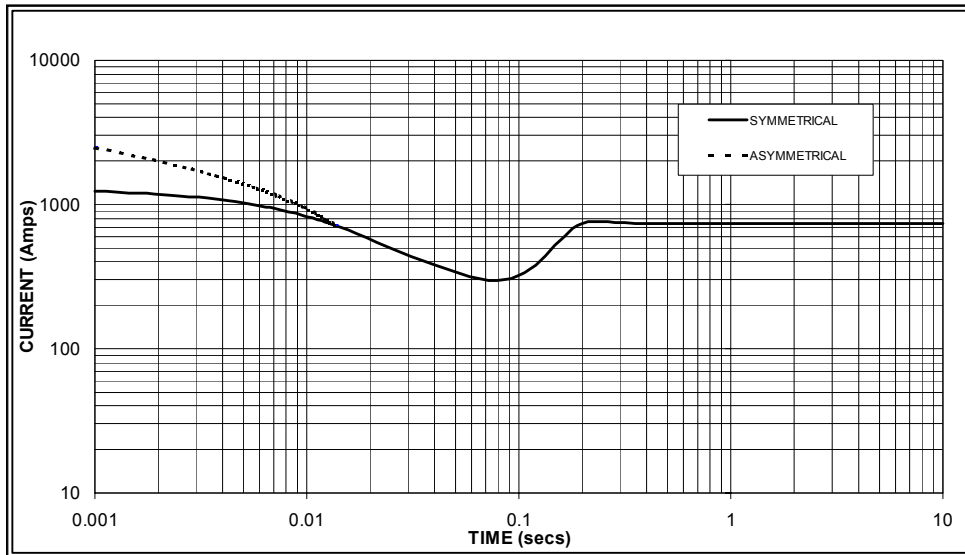

Sustained Short Circuit = 740 Amps

Note 1

The following multiplication factors should be used to adjust the values from curve between time 0.001 seconds and the minimum current point in respect of nominal operating voltage :

50Hz		60Hz	
Voltage	Factor	Voltage	Factor
380v	X 1.00	416v	X 1.00
400v	X 1.07	440v	X 1.06
415v	X 1.12	460v	X 1.12
440v	X 1.18	480v	X 1.17

The sustained current value is constant irrespective of voltage level

Note 2

The following multiplication factor should be used to convert the values calculated in accordance with NOTE 1 to those applicable to the various types of short circuit :

	3-phase	2-phase L-L	1-phase L-N
Instantaneous	x 1.00	x 0.87	x 1.30
Minimum	x 1.00	x 1.80	x 3.20
Sustained	x 1.00	x 1.50	x 2.50
Max. sustained duration	10 sec.	5 sec.	2 sec.

All other times are unchanged

Note 3

Curves are drawn for Star (Wye) connected machines. For other connection the following multipliers should be applied to current values as shown :

Parallel Star = Curve current value X 2

Series Delta = Curve current value X 1.732

UCI274E


Winding 311 / 0.8 Power Factor



RATINGS

Class - Temp Rise		Cont. F - 105/40°C				Cont. H - 125/40°C				Standby - 150/40°C				Standby - 163/27°C			
50 Hz	Series Star (V)	380	400	415	440	380	400	415	440	380	400	415	440	380	400	415	440
	Parallel Star (V)	190	200	208	220	190	200	208	220	190	200	208	220	190	200	208	220
	Series Delta (V)	220	230	240	254	220	230	240	254	220	230	240	254	220	230	240	254
	kVA	125.0	125.0	125.0	n/a	140.0	140.0	140.0	n/a	145.0	145.0	145.0	n/a	150.0	150.0	150.0	n/a
60 Hz	Series Star (V)	416	440	460	480	416	440	460	480	416	440	460	480	416	440	460	480
	Parallel Star (V)	208	220	230	240	208	220	230	240	208	220	230	240	208	220	230	240
	Series Delta (V)	240	254	266	277	240	254	266	277	240	254	266	277	240	254	266	277
	kVA	140.0	143.8	143.8	160.0	160.0	167.5	167.5	178.8	170.0	175.0	175.0	187.5	175.0	181.3	181.3	193.8
60 Hz	kW	112.0	115.0	115.0	128.0	128.0	134.0	134.0	143.0	136.0	140.0	140.0	150.0	140.0	145.0	145.0	155.0
	Efficiency (%)	91.7	92.1	92.3	n/a	91.3	91.7	92.0	n/a	91.1	91.6	91.8	n/a	91.0	91.4	91.7	n/a
	kW Input	109.1	108.6	108.3	n/a	122.7	122.1	121.7	n/a	127.3	126.6	126.4	n/a	131.9	131.3	130.9	n/a

DIMENSIONS

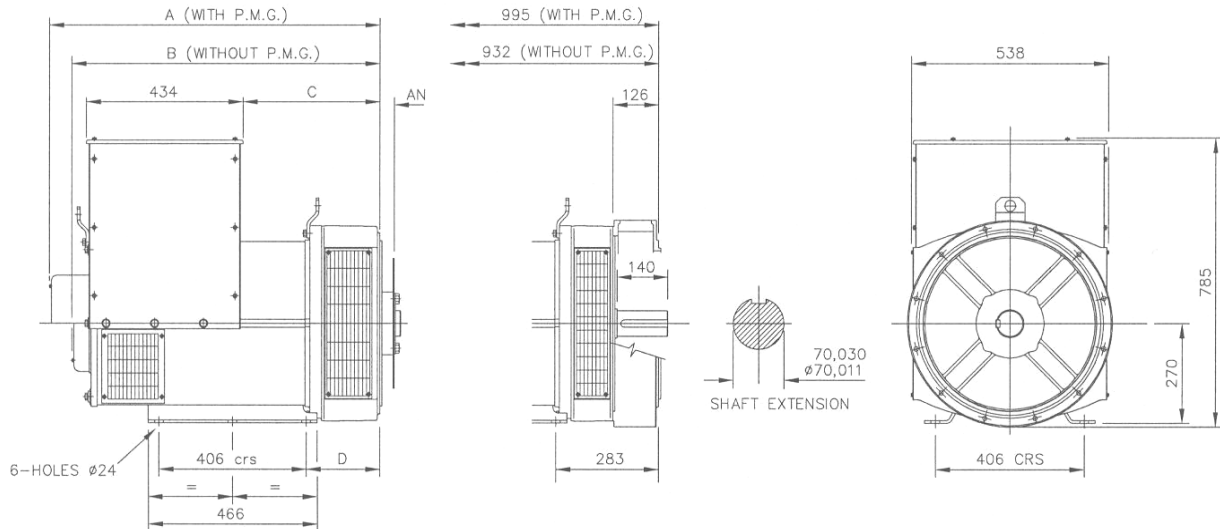

SINGLE BEARING ADAPTORS				
ADAPTOR	A	B	C	D
SAE 1	928,3	865,3	389,3	216,3
SAE 2	914	851	375	202
SAE 3	914	851	375	202

COUPLING DISCS	
DISC	AN
SAE 10	53,98
SAE 11,5	39,68
SAE 14	25,40



PO Box 17 • Barnack Road • Stamford • Lincolnshire • PE9 2NB

Tel: 00 44 (0)1780 484000 • Fax: 00 44 (0)1780 484100

Website: www.newage-avkseg.com

New IntelliLite^{NT}



SINGLE SET GEN-SET CONTROLLER

Description

IntelliLite^{NT} models are the new integrated controllers for gen-sets operating in single standby mode. Based on the field proven IntelliLite architecture, the new controllers fulfill every requirement needed for AMF and MRS applications – including modem and Internet control, user configuration and complete gen-set monitoring and protection.

IntelliLite^{NT} controllers are easy to use and feature an intuitive user interface with graphic display. The built-in event and performance log with backed-up real time clock makes troubleshooting even simpler.

The new design brings seamless integration with the latest breed of EFI diesel engines from all major manufacturers. This offers a higher level of functionality with users able to display a full range of values from the EFI engine on standard analog gauges and true RMS measurement of electric values.

Benefits

- ▷ Less wiring and components
- ▷ Less engineering and programming
- ▷ History log – easy troubleshooting and warranty claim handling
- ▷ Remote monitoring reduced call-out costs of service engineers
- ▷ Analog gauge (VDO, Datcon, ...) outputs – operator friendly
- ▷ Perfect price/performance ratio



ComAp is a member of AMPS
(The Association of Manufacturers
of Power generating Systems).



ComAp products meet the highest standards, with every stage of production undertaken in accordance with the ISO certification obtained in 1998.

InteliLite^{NT}

Features

▷ 3 phase AMF function*

- Over/Under frequency
- Over/Under voltage
- Voltage asymmetry

▷ 3 phase generator protections

- Over/Under frequency
- Over/Under voltage
- Current/Voltage asymmetry
- Overcurrent/Overload

▷ True RMS Voltage measurement

- 3 phase generator and mains* voltages
- Voltage range 277 V p-n, 480 V p-p
- Maximal measured voltage 300 V p-n
- PT ratio range 0.1–500

▷ True RMS current measurements

- 3 generator phase currents
- Current range 5 A
- Maximal measured current 10 A
- CT ratio range 1–5000

▷ Power measurements

- Act / React Power and Power Factor per phase
- Active and Reactive Energy counter

▷ Event and performance log + RTC

- Event based history with 119 events*
Reason, Data and Time + all important values are stored
- Battery backed-up RTC
- Test Run scheduler

▷ User interface

- Graphic 128 × 64 pixels display
- Multiple language capability
- Setpoints adjustable via keyboard or PC
- Buttons with mechanical feedback

▷ Inputs and outputs

- 3 configurable analog inputs
- 6 or 7* Binary inputs
- 6 or 7* Binary outputs
- Magnetic pick-up input
- D+ preexcitation terminal
- Optional 8 analog gauge drive outputs, compatible with VDO, Datcon gauges

▷ EFI engine support

- Cummins MODBUS
- Engine specific J1939 for all major manufacturers
- Diagnostic messages in plain text

▷ Communication interfaces

- Optional USB and RS232 plug-in modules
- MODBUS RTU (requires RS232 module)
- Internet

▷ Mechanical and operation parameters


- Unit dimension 120 × 180 mm
- Sealed front face rated for IP65
- Hard plexiglass LCD cover
- Operation temperature
-20°C – +70°C standard version
-40°C – +70°C low temperature version
- Power supply voltage 8–36 V
- Voltage drops shorter than 50 ms do not affect operation

Extension modules

- ▷ IL-NT RS232 RS232 plug-in interface
- ▷ IL-NT USB USB plug-in interface
- ▷ IL-NT AOUT8 gauge plug-in interface
- ▷ IL-NT RD remote display
- ▷ IG-IB Internet module
- ▷ IGS-PTM** extension I/O module
- ▷ IGS-IOM** extension I/O module
- ▷ IGL-RA15** 15 LED remote annunciator

* Only for Models AMF 20 and AMF 25

** Only for Models MRS 15, MRS 16 and AMF 25

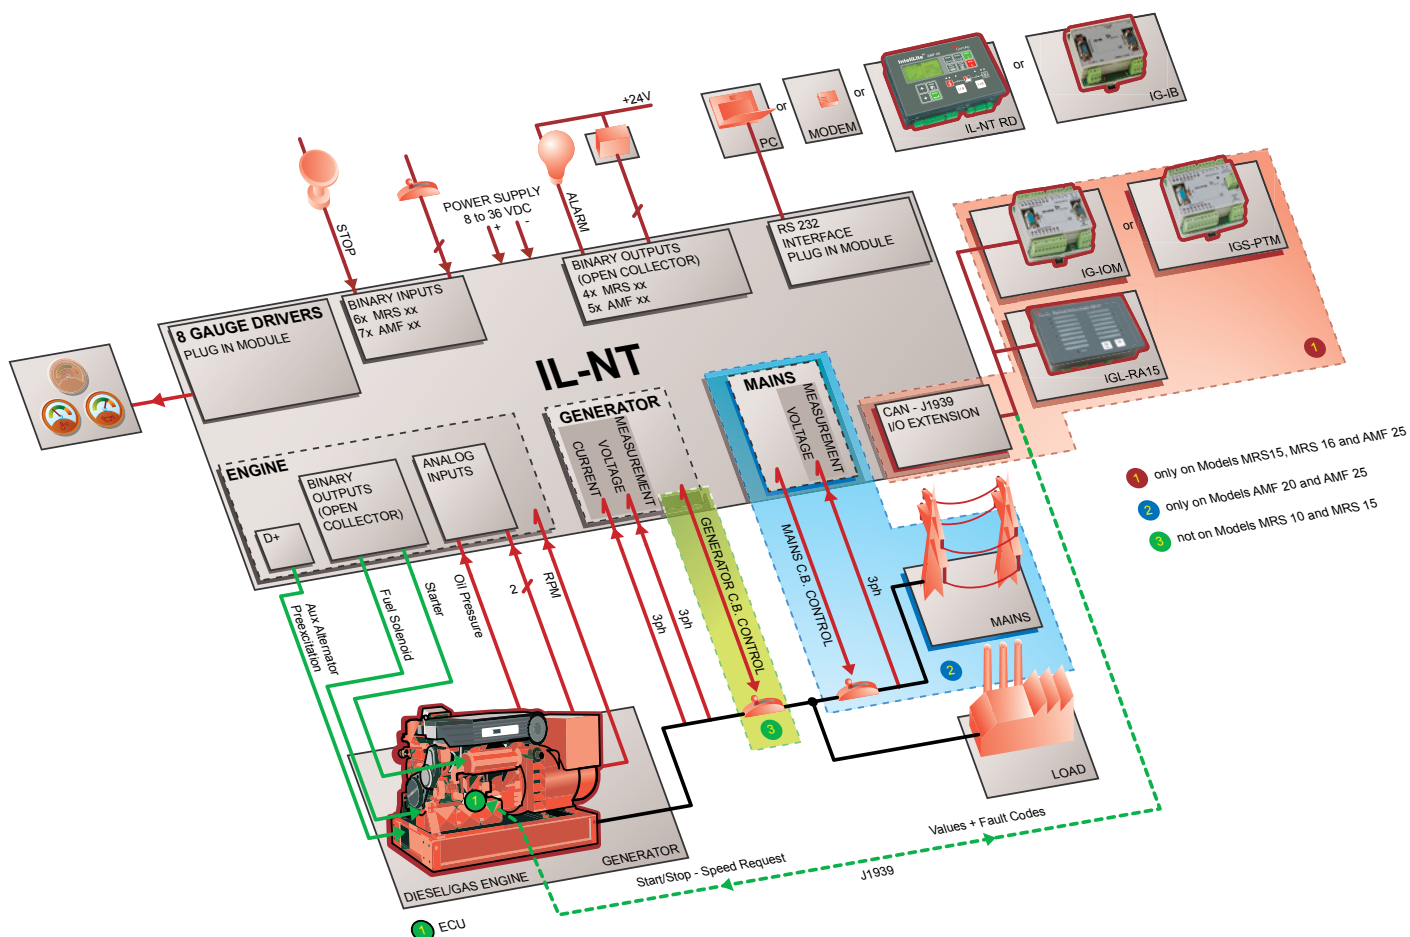

Available models

MRS 10

**MANUAL AND REMOTE
START CONTROLLER**



- ▷ 3 configurable analog inputs
- ▷ magnetic pickup input
- ▷ D+ preexcitation terminal
- ▷ 6 binary inputs
- ▷ 6 binary outputs

MRS 11

**MANUAL AND REMOTE
START CONTROLLER**



- ▷ 3 configurable analog inputs
- ▷ magnetic pickup input
- ▷ D+ preexcitation terminal
- ▷ 6 binary inputs
- ▷ 6 binary outputs
- ▷ GCB control

AMF 20

**AUTOMATIC MAINS FAILURE
START CONTROLLER**



- ▷ 3 configurable analog inputs
- ▷ magnetic pickup input
- ▷ D+ preexcitation terminal
- ▷ 7 binary inputs
- ▷ 7 binary outputs
- ▷ GCB and MCB control

MRS 15

**MANUAL AND REMOTE
START CONTROLLER WITH
SUPPORT FOR EFI ENGINES**



- ▷ 3 configurable analog inputs
- ▷ magnetic pickup input
- ▷ D+ preexcitation terminal
- ▷ 6 binary inputs
- ▷ 6 binary outputs
- ▷ CAN with J1939 support
- ▷ extension modules capability
- ▷ event and performance log

MRS 16

**MANUAL AND REMOTE
START CONTROLLER WITH
SUPPORT FOR EFI ENGINES**



- ▷ 3 configurable analog inputs
- ▷ magnetic pickup input
- ▷ D+ preexcitation terminal
- ▷ 6 binary inputs
- ▷ 6 binary outputs
- ▷ GCB control
- ▷ CAN with J1939 support
- ▷ extension modules capability
- ▷ event and performance log

AMF 25

**AUTOMATIC MAINS FAILURE
START CONTROLLER WITH
SUPPORT FOR EFI ENGINE**



- ▷ 3 configurable analog inputs
- ▷ magnetic pickup input
- ▷ D+ preexcitation terminal
- ▷ 7 binary inputs
- ▷ 7 binary outputs
- ▷ GCB and MCB control
- ▷ CAN with J1939 support
- ▷ extension modules capability
- ▷ event and performance log

The Chart of Functions of IntelliLite^{NT} Controllers

FUNCTIONS/CONTROLLERS	IL-NT MRS 10	IL-NT MRS 15	IL-NT MRS 11	IL-NT MRS 16	IL-NT AMF 20	IL-NT AMF 25
Binary inputs/outputs	6 / 6	6 / 6	6 / 6	6 / 6	7 / 7	7 / 7
Analog inputs	3	3	3	3	3	3
Magnetic pick-up	●	●	●	●	●	●
AMF function	–	–	–	–	●	●
Input configuration	●	●	●	●	●	●
Output configuration	●	●	●	●	●	●
Voltage measurement Gen. / Mains	3 ph / –	3 ph / –	3 ph / –	3 ph / –	3 ph / 3 ph	3 ph / 3 ph
Current measurement	3 ph	3 ph, IDMT overcurrent	3 ph	3 ph, IDMT overcurrent	3 ph	3 ph, IDMT overcurrent
kW/kWh measurement	● / –	● / ●	● / –	● / ●	● / –	● / ●
History file	–	●	–	●	–	●
RTC with battery	●	●	●	●	●	●
GCB/MCB control with feedback	– ¹⁾ / –	– ¹⁾ / –	● ²⁾ / –	● ²⁾ / –	● / ●	● / ●
Battery charging alternator circuit	●	●	●	●	●	●
J1939 interface	–	●	–	●	–	●
Internet support	with IG-IB	with IG-IB	with IG-IB	with IG-IB	with IG-IB	with IG-IB
Extension modules	–	IGL-RA15, IG-IOM, IGS-PTM	–	IGL-RA15, IG-IOM, IGS-PTM	–	IGL-RA15, IG-IOM, IGS-PTM
8 analog gauge drivers	0	0	0	0	0	0
RS232 interface	0	0	0	0	0	0
Modem interface	0	0	0	0	0	0
MODBUS interface	0	0	0	0	0	0
Remote display	0	0	0	0	0	0
Cummins MODBUS	0	0	0	0	0	0

Key: ● included
 – excluded
 0 optional – plug-in module required
 1) Automatic GCB control without feedback
 2) Manual/Automatic GCB control, but without feedback

Legend: IG-IOM/IGS-PTM: I/O extension modules
 IGL-RA15: Remote annunciator
 GCB: Generator circuit breaker
 MCB: Mains circuit breaker

For more information about our products and solutions visit our web-page

www.comap.cz



MANUFACTURER:

ComAp, spol. s r. o.
 Czech Republic
 Phone: + 420 246 012 111
 Fax: + 420 266 316 647
 E-mail: info@comap.cz
 Internet: www.comap.cz

LOCAL DISTRIBUTOR / PARTNER:

